



Series 7 TR1.

505-540 Watt Thin Film Solar Module

Series 7 TR1 thin film solar modules combine First Solar's thin film technology with an optimized structural design to deliver improved efficiency, enhanced installation velocity, and unmatched lifetime energy performance for large/utility-scale PV projects.



More Lifetime Energy per Nameplate Watt

- Industry's best (0.3%/yr) warranted degradation rate (>89% power output after 30 years)
- Superior temperature coefficient, spectral and shading response



Unmatched Quality and Reliability

- End-to-end manufacturing process for globally consistent quality
- Tested and certified to IEC standards and beyond
- Durable glass/glass construction
- Immune to and warranted against power loss from cell cracking
- 30-year Linear Performance Warranty
- 12-year Limited Product Warranty



Optimized Module Design

- Optimized back rail mount design enhances installation velocity
- Frameless design improves soiling and snow shedding
- Dual junction box design reduces wire management complexity and cost



Industry's Most Eco-efficient PV Solution

- Industry leading carbon footprint, water footprint and energy payback time
- Globally available PV module recycling services



America's Solar Company

- Designed, responsibly sourced, and manufactured in the USA


19.3%
HIGH BIN EFFICIENCY

30YR
LINEAR PERFORMANCE
WARRANTY

98%
WARRANTY START POINT

0.3%
WARRANTED ANNUAL
DEGRADATION RATE

First Solar Lifetime Energy Advantage
From 30 Year Warranted Annual Power Degradation

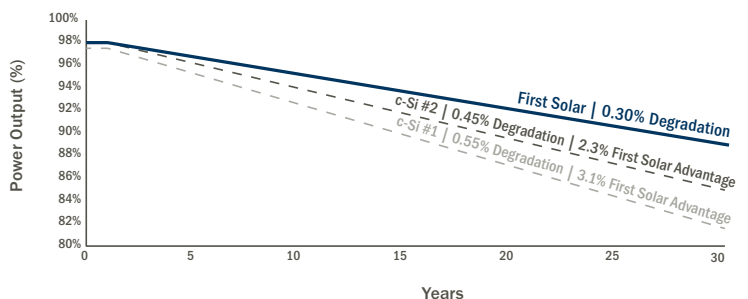

Learn more about First Solar and Series 7 TR1 at firstsolar.com/S7

Series 7 TR1.

Electrical Specifications

MODEL TYPES: FS-7XXXA-TR1 (XXX = NOMINAL POWER)
RATINGS AT STANDARD TEST CONDITIONS (1000W/m², AM 1.5, 25°C)²

Nominal Power ³ (-0/+5%)	P _{MAX} (W)	505	510	515	520	525	530	535	540
Efficiency (%)	%	18.1	18.3	18.4	18.6	18.8	19.0	19.1	19.3
Cell Efficiency (%)	%	18.9	19.1	19.3	19.5	19.7	19.9	20.1	20.3
Voltage at P _{MAX}	V _{MAX} (V)	182.5	183.4	184.3	185.2	186.0	186.9	187.8	188.7
Current at P _{MAX}	I _{MAX} (A)	2.77	2.78	2.80	2.81	2.82	2.84	2.85	2.86
Open Circuit Voltage	V _{OC} (V)	223.9	221.5	225.0	225.6	226.1	226.7	227.2	227.7
Short Circuit Current	I _{SC} (A)	3.01	3.02	3.03	3.04	3.04	3.05	3.06	3.06
Maximum System Voltage	V _{SYS} (V)	1500 ⁵							
Limiting Reverse Current	I _R (A)	5.0							
Maximum Series Fuse	I _{CF} (A)	5.0							


RATINGS AT NOMINAL OPERATING CELL TEMPERATURE OF 45°C (800W/m², 20°C air temperature, AM 1.5, 1m/s wind speed)²

Nominal Power	P _{MAX} (W)	378.1	381.8	385.6	389.4	393.2	396.8	400.6	404.4
Voltage at P _{MAX}	V _{MAX} (V)	168.8	169.7	170.6	170.8	171.7	172.5	173.4	174.3
Current at P _{MAX}	I _{MAX} (A)	2.24	2.25	2.26	2.28	2.29	2.30	2.31	2.32
Open Circuit Voltage	V _{OC} (V)	209.1	212.4	212.9	213.5	214.0	214.5	215.0	215.5
Short Circuit Current	I _{SC} (A)	2.44	2.44	2.45	2.45	2.46	2.47	2.47	2.48

TEMPERATURE CHARACTERISTICS

Module Operating Temperature Range	(°C)	-40 to +85
Temperature Coefficient of P _{MAX}	T _K (P _{MAX})	-0.32%/°C [Temperature Range: 25°C to 75°C]
Temperature Coefficient of V _{OC}	T _K (V _{OC})	-0.28%/°C
Temperature Coefficient of I _{SC}	T _K (I _{SC})	+0.04%/°C

Mechanical Specifications

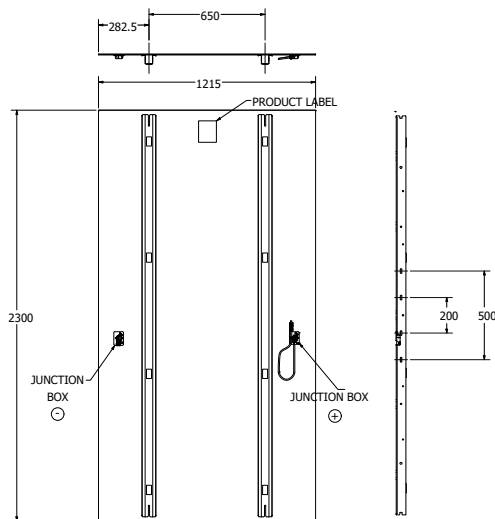

PACKAGING INFORMATION

Model Type	Modules Per Pack	Packs per 53' Container
FS-7XXXA-TR1	46	10



LEADING THE WORLD'S
SUSTAINABLE ENERGY FUTURE

First Solar

Disclaimer

All images shown are provided for illustrative purposes only and may not be an exact representation of the product. First Solar, Inc. reserves the right to change product images at any time without notice.

The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

First Solar, the First Solar logo, and Leading the World's Sustainable Energy Future are trademarks of First Solar, Inc., registered in the U.S. and other countries. Series 7 and TR1 are trademarks of First Solar, Inc.

Certifications & Tests⁴

CERTIFICATIONS & LISTINGS

UL 61730 1500V Listed
 IEC 61215:2021 & 61730-1:2016⁵
 IEC 61701 Salt Mist Corrosion
 IEC 60068-2-68 Dust and Sand Resistance
 IEC 62716 Ammonia Corrosion
 Buy American Act (BAA) Compliant

EXTENDED DURABILITY TESTS

IEC 63209-1 Extended Stress Test
 Long-Term Sequential
 Thresher Test
 PID Resistant

QUALITY & EHS

ISO 9001:2015
 ISO 14001:2015
 ISO 45001:2018
 ISO 14064-3:2006
 EPEAT Silver Registered



MECHANICAL DESCRIPTION

Length	2300mm
Width	1215mm
Area	2.79m ²
Module Weight	39.7kg
Leadwire ⁶	2.5mm ² , 650mm (+) & Bulkhead (-)
Connectors	TE Connectivity PV4-S or alternate
Junction Box	IP68 Rated
Bypass Diode	N/A
Cell Type	Thin film CdTe semiconductor, up to 268 cells
Back Rail Material	Galvanized steel
Front Glass	Heat strengthened
Back Glass	Heat strengthened
Encapsulation	Laminate material with edge seal
Frame to Glass Adhesive	Silicone
Load Rating	2400Pa

Install in portrait only

- Limited power output and product warranties subject to warranty terms and conditions
- All ratings ±10%, unless specified otherwise. Specifications are subject to change
- Measurement uncertainty applies
- Testing Certifications/Listings pending
- IEC 61730-1: 2016 Class II
- Leadwire length from junction box exit to connector mating surface