

HIGH-POWER PV MODULES

First Solar Series 6 Plus™ photovoltaic (PV) modules set the industry benchmark for reliable energy production, optimized design and environmental performance. The advanced design is optimized for every stage of your application, significantly reducing balance of system, shipping, and operating costs.



PROVEN PERFORMANCE

- With superior temperature coefficient, spectral response and shading behavior, Series 6 Plus modules generate up to 8% more energy per watt than conventional crystalline silicon solar modules
- Unlike crystalline silicon modules, First Solar's thin film technology does not experience the losses associated with LID and LeTID
- Anti-reflective coated glass enhances energy production



INNOVATIVE MODULE DESIGN


- Under-mount frame provides the cleaning and snow-shedding benefits of a frameless module while protecting edges against breakage
- Innovative SpeedSlots™ combine the robustness of bottom mounting with the speed of top clamping while utilizing fewer fasteners to achieve the industry's fastest installation times and lowest mounting hardware costs
- Dual junction box design optimizes module-to-module connections and eliminates the need for wire management

430-460 Watts
Up to 18.3% Efficiency

INDUSTRY-LEADING MODULE WARRANTY¹

98% WARRANTY START POINT

0.5% WARRANTED ANNUAL DEGRADATION RATE

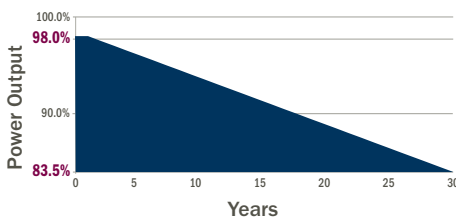

- 30-Year Linear Performance Warranty
- 12-Year Limited Product Warranty
- Industry's first and only Cell Cracking Warranty



BEST IN-CLASS RELIABILITY & DURABILITY

- Manufactured under one roof with 100% traceable QA/QC
- Independently tested and certified for reliable performance that exceeds IEC standards in high temperature, high humidity, extreme desert and coastal applications
- Inherently immune to and warranted against power loss from cell cracking
- Durable glass/glass construction with market-leading hail impact certification



BEST ENVIRONMENTAL PROFILE

- Fastest energy payback time in the industry
- Carbon footprint that is up to 6X lower and a water footprint that is up to 24X times lower than conventional c-Si solar panels on a life cycle basis
- Global PV module recycling services available through First Solar or customer-selected third-party

FIRST SOLAR SERIES 6 PLUS™

MODEL TYPES: FS-6XXX-P / FS-6XXXA-P / FS-6XXX-P-I / FS-6XXXA-P-I
(XXX = NOMINAL POWER)

RATINGS AT STANDARD TEST CONDITIONS (1000W/m², AM 1.5, 25°C)²

Parameter	Symbol	430	435	440	445	450	455	460
Nominal Power ³ (-0/+5%)	P _{MAX} (W)	430	435	440	445	450	455	460
Efficiency (%)	%	17.1	17.3	17.5	17.7	17.9	18.1	18.3
Voltage at P _{MAX}	V _{MAX} (V)	182.6	183.6	184.7	185.7	186.8	187.8	188.8
Current at P _{MAX}	I _{MAX} (A)	2.36	2.37	2.38	2.40	2.41	2.42	2.44
Open Circuit Voltage	V _{OC} (V)	219.2	219.6	220.0	220.4	221.1	222.0	222.9
Short Circuit Current	I _{SC} (A)	2.54	2.55	2.55	2.56	2.57	2.58	2.59
Maximum System Voltage	V _{SYS} (V)	1500 ⁵						
Limiting Reverse Current	I _R (A)	5.0						
Maximum Series Fuse	I _{CF} (A)	5.0						

RATINGS AT NOMINAL OPERATING CELL TEMPERATURE OF 45°C (800W/m², 20°C air temperature, AM 1.5, 1m/s wind speed)²

Parameter	Symbol	324.7	328.5	332.4	336.0	339.9	343.6	347.3
Nominal Power	P _{MAX} (W)	324.7	328.5	332.4	336.0	339.9	343.6	347.3
Voltage at P _{MAX}	V _{MAX} (V)	170.9	172.0	173.1	174.1	175.2	176.2	176.3
Current at P _{MAX}	I _{MAX} (A)	1.90	1.91	1.92	1.93	1.94	1.95	1.97
Open Circuit Voltage	V _{OC} (V)	207.0	207.3	207.7	208.0	208.8	209.6	210.4
Short Circuit Current	I _{SC} (A)	2.05	2.06	2.06	2.06	2.07	2.08	2.09

TEMPERATURE CHARACTERISTICS

Module Operating Temperature Range	(°C)	-40 to +85
Temperature Coefficient of P _{MAX}	T _K (P _{MAX})	-0.32%/°C [Temperature Range: 25°C to 75°C]
Temperature Coefficient of V _{OC}	T _K (V _{OC})	-0.28%/°C
Temperature Coefficient of I _{SC}	T _K (I _{SC})	+0.04%/°C

MECHANICAL DESCRIPTION

Length	2024mm
Width	1245mm
Area	2.52m ²
Module Weight	34.9kg (FS-6XXX-P / FS-6XXXA-P) 34.2kg (FS-6XXX-P-I / FS-6XXXA-P-I)
Leadwire ⁶	2.5mm ² , 733mm (+) & Bulkhead (-)
Connectors	TE Connectivity PV4-S, MC4-EVO 2, or alternate
Junction Box	IP68 Rated
Bypass Diode	N/A
Cell Type	Thin film CdTe semiconductor, up to 264 cells
Frame Material	Anodized Aluminum
Front Glass	Heat strengthened
Back Glass	Heat strengthened
Encapsulation	Laminate material with edge seal
Frame to Glass Adhesive	Silicone
Load Rating ^{7,8}	2400Pa

PACKAGING INFORMATION

Model Type	Modules Per Pack	Packs per 40' Container
FS-6XXX-P / FS-6XXXA-P	27	18
FS-6XXX-P-I / FS-6XXXA-P-I	29	18

Disclaimer

The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

The First Solar logo, First Solar™, and all products denoted with ® are registered trademarks, and those denoted with a ™ are trademarks of First Solar, Inc.

CERTIFICATIONS AND TESTS ⁴

IEC

61215:2016 & 61730-1:2016⁵, CE
61701 Salt Mist Corrosion
60068-2-68 Dust and Sand Resistance

UL

UL 61730 1500V Listed

REGIONAL CERTIFICATIONS

InMetro SII
BIS FSEC
MyHijau
Buy American Act (BAA) Compliant

EXTENDED DURABILITY TESTS


ANSI/CAN/CSA-C450-18
Long-Term Sequential
Thresher Test
PID Resistant

QUALITY & EHS

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
EPEAT Silver Registered



MECHANICAL DRAWING

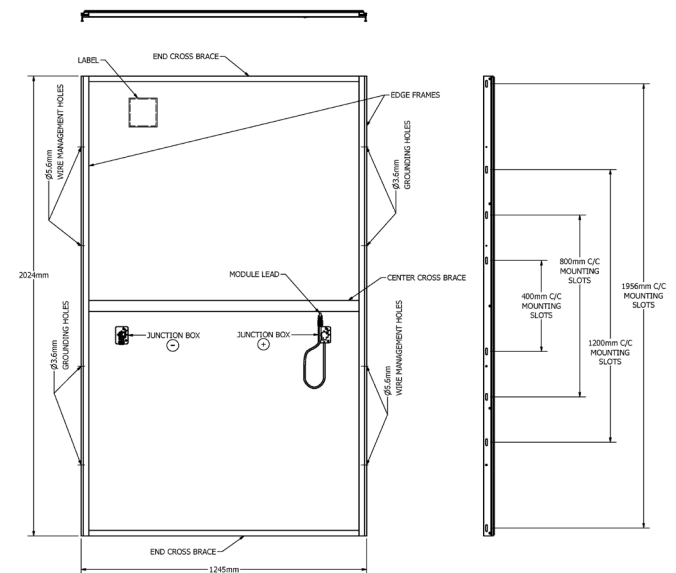

Install in portrait only

- Limited power output and product warranties subject to warranty terms and conditions
- All ratings ±10%, unless specified otherwise. Specifications are subject to change
- Measurement uncertainty applies
- Testing Certifications/Listings pending
- IEC 61730-1: 2016 Class II
- Leadwire length from junction box exit to connector mating surface
- 1500Pa tentative load rating for 1956mm mounting slots. Higher loads may be acceptable, subject to testing
- Model Types FS-6XXX-P-I and FS-6XXXA-P-I meet UL 61730 with a reduced mechanical design load. Consult Module User Guide for additional details